Lever Hoist
LX Model
250 kg and 500 kg

The Small One
for work in tight quarters

- **Aluminium body** extremely lightweight and compact, only 1,7 kg net weight (LX003)
- **Safetyguards** against accidental freewheeling under load
- **Effortless handling** smooth geared mechanism, 2 mm lift per click
- **Short lever** only 150 mm (LX003)

Made in Japan!

www.kito.net

Kito Europe GmbH
Heerdter Lohweg 93
D-40549 Düsseldorf
Tel. + 49 (0) 211 - 52 80 09 - 0
Fax + 49 (0) 211 - 52 80 09 - 59
info@kito.net
www.kito.net

KITO HEBEZEUGE
Mit Sicherheit das Original

Freewheel chain adjusting mechanism

Easy to maintain
Corrosion resistant and long-lasting

Nickel plated load chain
grade 100 (V) (1000 N/mm²), in accordance with standard EN 818-7

Hook latch with safety tip

Options: Carrying case for Model LX003

Dimensions (mm)

	LX003	LX005
a	90,5	102,0
b	73,5	93,0
C	205,0	246,0
D	150,0	180,0
e	62,0	68,0
g	21,0	24,5
s	32,0	35,5
t	11,0	12,0

LX003



LX005

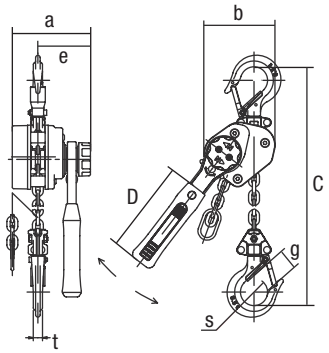

Technical data

Type	LX003	LX005
Capacity, kg	250	500
Standard lift, m	1,5	1,5
Hand pull to lift full load, daN	20	31
Load chain diameter, mm	3,2 x 9,0	4,3 x 12,0
Chain fall	1	1
Net weight, kg	1,7	2,7
Test weight, kg	380	750
Weight for additional 1 m lift, kg	0,2	0,4

Disclaimer:
KITO does not assume liability for inappropriate usage of products.
Operating instructions must be followed at all times.
Subject to technical change, misprint and errors.

Contact
Kito Europe GmbH / Heerdter Lohweg 93 / D-40549 Düsseldorf
Tel. +49 (0) 211 / 52 80 09 - 0 / Fax +49 (0) 211 / 52 80 09 - 59
info@kito.net / www.kito.net